


TYPICAL PLASTEEL[®] ELUTRON[®] CONTAINMENT SUMP COLLAR (SECONDARY CONTAINMENT OF FITTINGS)

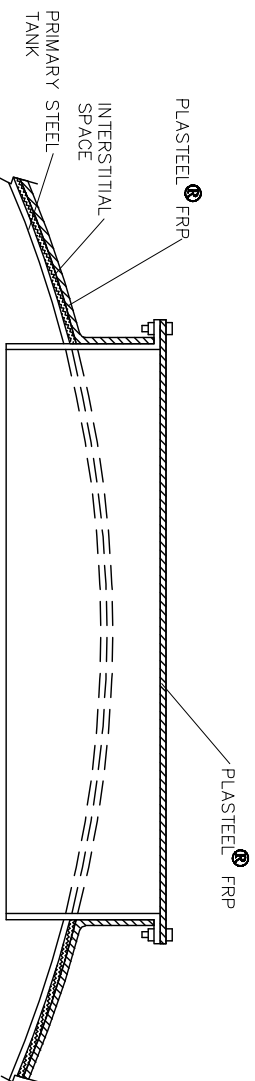

TYPICAL PLASTEEL[®] ELUTRON[®] 24" [60.94cm] INSIDE DIAMETER MANWAY

1. THE COLLAR SERVES AS AN ATTACHMENT DEVICE ON THE TANK TOP CENTERLINE FOR OPEN BOTTOM FRP PIPING CONTAINMENT SUMPS. COLLAR DIMENSIONS WILL VARY BASED ON THE FRP SUMP MANUFACTURER'S DIMENSIONS.
2. COLLARS CAN BE PROVIDED WITH PLASTEEL[®] ELUTRON[®] TANKS AND PLASTEEL COMPOSITE[®] DOUBLE WALL TANKS.
3. THE COLLAR CAN BE A STEEL COLLAR WELDED TO THE STEEL PRIMARY TANK WITH A PLASTEEL[®] FRP EXTERIOR. THE COLLAR CAN ALSO BE A 100% FRP COLLAR.
4. COLLARS ARE AN OPTIONAL DEVICE. CONSULT YOUR PLASTEEL[®] TANK MANUFACTURER FOR SPECIFIC DETAILS AND AVAILABILITY.
5. THE PLASTEEL[®] BOLTED AND GASKETED MANWAY IS AN OPTIONAL DEVICE THAT IS WELDED TO THE STEEL TANK. THE PLASTEEL[®] MANWAY COMPLIES WITH UL STANDARD 58 FOR CONSTRUCTION, TESTING AND GASKETS. CONSULT YOUR PLASTEEL[®] TANK MANUFACTURER FOR SPECIFIC DETAILS AND AVAILABILITY.

PLASTEEL
INTERNATIONAL INC.

2641 STATE STREET, SUITE #205

CARLSBAD, CA 92008

PHONE: 1-760-729-1083

FAX 1-760-729-1086

SCALE: NONE

APPROVED BY:

DRAWN BY:

DATE: 1-24-07

TYPICAL PLASTEEL[®] COLLAR

TYPICAL PLASTEEL[®] MANWAY